

KEMPEROL® 022

Waterproofing for indoor areas
underneath ceramic tiles



 **KEMPEROL®**



Waterproofing to ETAG 022

KEMPEROL® 022 is a solvent-free, liquid-applied waterproofing with full-surface KEMPEROL® 500 Fleece reinforcement.

KEMPEROL® 022 Waterproofing is the ideal product for compliant and safe waterproofing of walls and floors in wet rooms, e.g. private bathrooms, bathrooms in hotels, shower installations, utility rooms, washrooms and the sides and edges of swimming pools.

The advantages of KEMPEROL® 022 Waterproofing:

- ETAG 022 tested
- European technical approval (ETA-03/0155)
- Solvent free
- Full fleece reinforcement
- Even layer thickness
- Spans 2 mm joints
- Bridges 1.5 mm cracks
- No sealing tape required
- Time saving, one application system
- Finished layer thickness of 1 mm

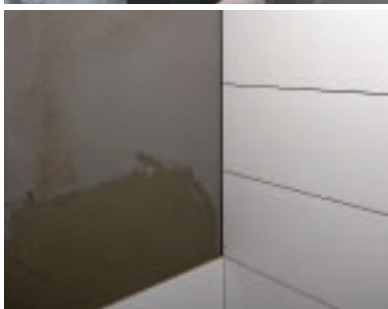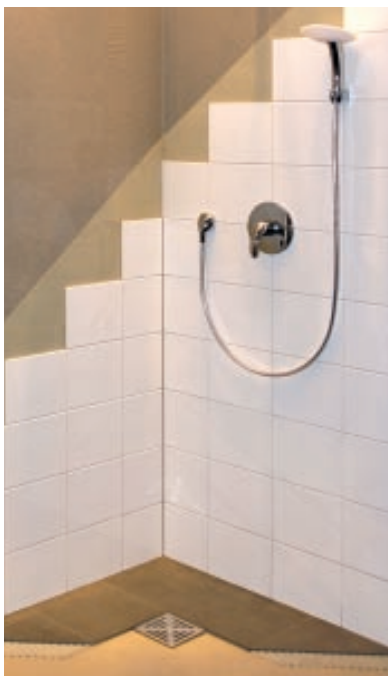

Application

- If necessary, the substrate is pre-treated in line with priming recommendations.
- Waterproofing is applied wet-on-wet in a single process.
- The wet surface is subsequently scattered with KEMPERTEC® NQ 0408 Natural Quartz.
- Ceramic tiles can then be fixed directly on the cured waterproofing using KEMPERDUR® MT Mineral Tile Adhesive.

